

# GENUINE AQUA PRO

WATER PURIFIER



MEMBER  
WATER  
QUALITY  
ASSOCIATION




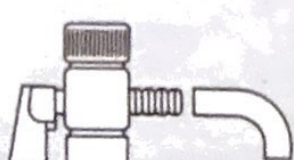
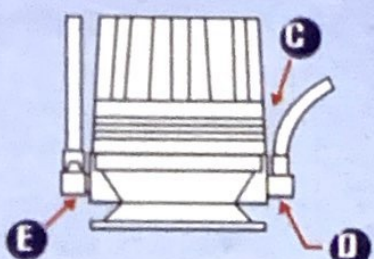
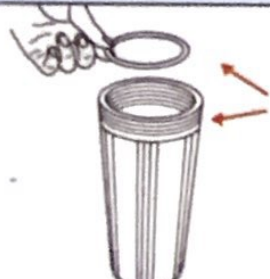





# GENUINE AQUA PRO

WATER PURIFIER

## CAUTION:

1. IMMEDIATELY AFTER INSTALLATION THE CARTRIDGE WILL DISCHARGE A VERY SMALL AMOUNT OF CARBON (FINES POWDER). BEFORE THIS CARTRIDGE IS READY FOR USE, RUN YOUR TAP FOR TWO MINUTIES TO REMOVE FINE POWDER.
2. FOR EACH USE WE RECOMMEND THAT YOUR RUN TAP FOR AT LEAST 60 SECONDS PRIOR TO USING WATER, THIS IS ESPECIALLY IMPORTANT IF THE WATER TAP HAS NOT BEEN USED DAILY.
3. THE CARTRIDGE SHOULD BE CHANGED WHEN CHLORINE RETURN.

## PROBLEMS SOLUTION:

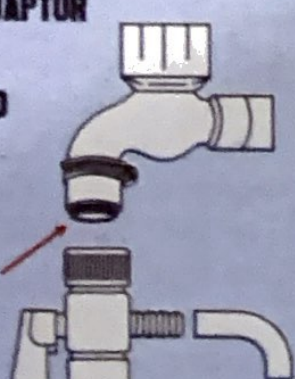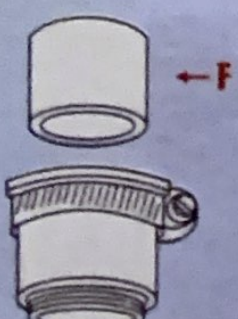PROBLEMS	SOLUTION METHOD
<p>(A) ADAPTOR OR (B) EXTERNAL ADAPTOR NOT FIT TO YOUR FAUCET.</p> 	<p>PLEASE CALL YOUR DEALER</p>
<p>FILTERED WATER DO NOT FLOW.</p>	<p>1. CHECK IF THE FAUCET IS OPEN. 2. CHECK IF THE HANDLE OF DIVERTER VALVE IS TURNED HORIZONTALLY.</p> 
<p>LEAKING IN HOUSING</p> 	<p>1. IF (C) LEAKING, PLEASE CHECK IF O-RING IS IN PROPER POSITION, IF IT'S STILL LEAKING, FOLLOW NEXT DRAWING. 2. IF (D) LEAKING, PLEASE TAKE OFF IT AND WIND TEFLON SEAL ON IT AGAIN. 3. IF (E) LEAKING, SAME AS ABOVE.</p>
<p>DREGS?</p> 	<p>1. TAKE OUT O-RING FROM BOWL OF HOUSING, AND CHECK IF THERE ARE ANY DREGS LEFT IN/ON THE GROOVE/O-RING. 2. IF SO, PLEASE REMOVE IT FROM THERE.</p>
<p>WATER FLOW BECOME SMALL</p>	<p>1. CHANGE NEW CARTRIDGE. 2. CHECK IF THE DIVERTER VALVE IS CLOGGED.</p> 
<p>LEAKING IN THE CONNECTION BETWEEN DIVERTER VALVE AND THREADED FAUCET.</p> 	<p>1. CHECK IF THE GASKET OF ADAPTOR IS LOST. 2. CHECK IF THE O-RING OF DIVERTER VALVE IS LOST.</p> 
<p>LEAKING IN THE CONNECTION BETWEEN EXTERNAL ADAPTOR AND UN-THREADED FAUCET.</p> 	<p>1. PLEASE CHECK IF THE SPACE BETWEEN THE EXTERNAL ADAPTOR IS TOO LARGE. IF YES, PLEASE PUT THE RUBBER (FIG. F) INSIDE THE ADAPTOR AND TIGHTEN THE HOSE CLAMP BY SCREWDRIVER.</p> 

# GENUINE AQUA PRO

WATER PURIFIER

## FUNCTION:


REMOVAL OF CHLORINE, VOLATILE ORGANIC COMPOUNDS (VOCs), CHLORINATED HYDROCARBONS, PARTICULATES, AND DISSOLVED ORGANIC IMPURITIES FROM WATER, AQUEOUS SOLUTIONS OR SUSPENSIONS AND MANY ORGANIC SOLVENTS.

## FEATURE:

USING CARBON BLOCK REPLACEMENT CARTRIDGE WHICH FILTERS FLOW IN THE RADIAL (OUTSIDE-TO-INSIDE) DIRECTION, PROVIDING INCREASED DIRT CAPACITY AND LOW PRESSURE DROP.


### FITS ON SINGLE HANDLE OR DOUBLE HANDLE FAUCET

IF YOUR FAUCET IS WITH INNER THREADS OF SPOUT.

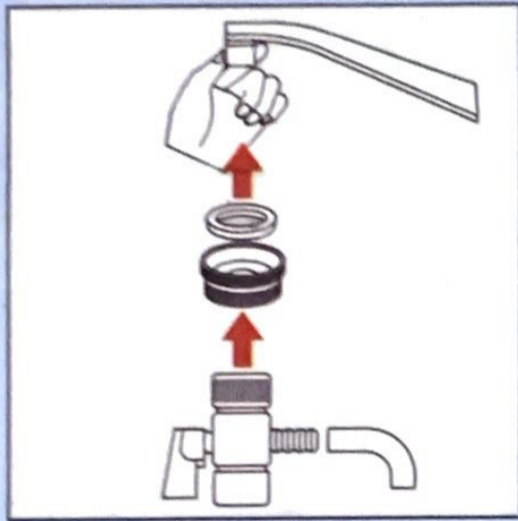

1. TAKE OFF THE AERATOR FROM THE FAUCET.
2. PUT THE ADAPTOR AND RUBBER WASHER INTO THE FAUCET AND TIGHTEN IT.
3. REVOLVE DIVERTER VALVE INTO THE ADAPTOR.

IF YOUR FAUCET IS WITH THREADS OUTSIDE OF SPOUT.

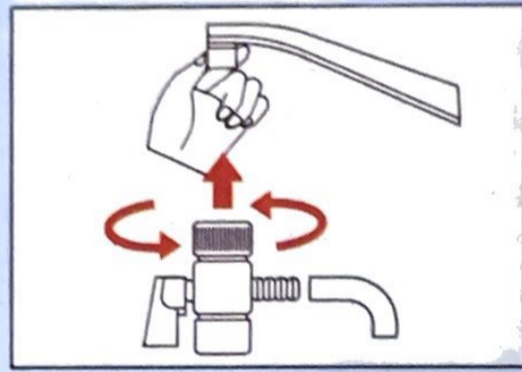


1. TAKE OFF THE AERATOR FROM THE FAUCET AND REVOLVE THE DIVERTER VALVE INTO THE FAUCET DIRECTLY. (PLEASE CHECK IF THERE IS AN O-RING INSIDE THE DIVERTER VALVE).




### TO FIT TO NON-THREAD FAUCET

IF YOUR FAUCET IS 1/2" OD AND WITHOUT THREAD:

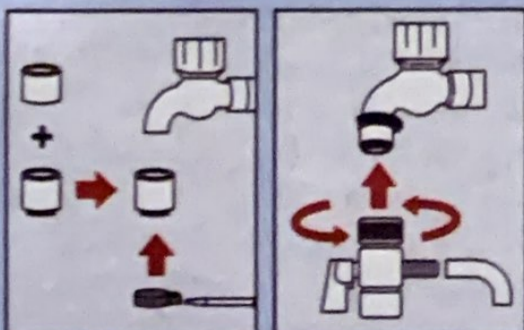


1. INSERT RUBBER INTO EXTERNAL ADAPTOR.
2. PUT EXTERNAL ADAPTOR ON THE FAUCET AND TIGHTEN THE HOSE CLAMP BY SCREWDRIVER.
3. REVOLVE THE DIVERTER VALVE INTO THE EXTERNAL ADAPTOR.

IF YOUR FAUCET IS 3/4" OD AND WITHOUT THREAD:

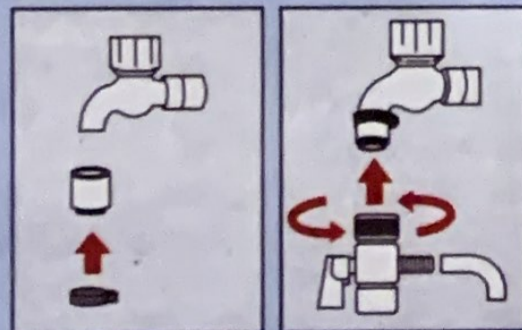

1. PUT EXTERNAL ADAPTOR ON THE FAUCET AND TIGHTEN THE HOSE CLAMP BY SCREWDRIVER. (NO NEED RUBBER)
2. REVOLVE THE DIVERTER VALVE INTO THE EXTERNAL ADAPTOR.



# SUPERBLOCK

## CARBON BLOCK FILTER

- ✓ 0.4 Micron Filtration
- ✓ Chlorine Removal >99.9%
- ✓ Chloroform Removal >99.9%
- ✓ Mercury Removal >99.9%
- ✓ Copper Removal >99.9%
- ✓ Lead Removal >99.9%
- ✓ Cyst Removal  
Giardia, Cryptosporidium
- ✓ Performance tested & verified  
by independant laboratory testing  
in both Australia & the USA

Only use with microbiologically safe water or with  
adequate pre-filtration i.e. Doulton Sterasy! Cartridges

Cycle Life of 1 Year or 5000 litres,  
may vary depending on water quality.  
Flow Rate of 3 litres per minute.  
Flush with 5-10 litres of water  
before drinking.

NSF

System tested and certified to NSF  
ANSI NSF Standard 42 for reduction of  
Chlorine, Taste and Odor, and NSF  
Standard 53 for reduction of Lead and  
Cadmium.